



Antrieb M

Antrieb M 11, M 21, M 1, M 2

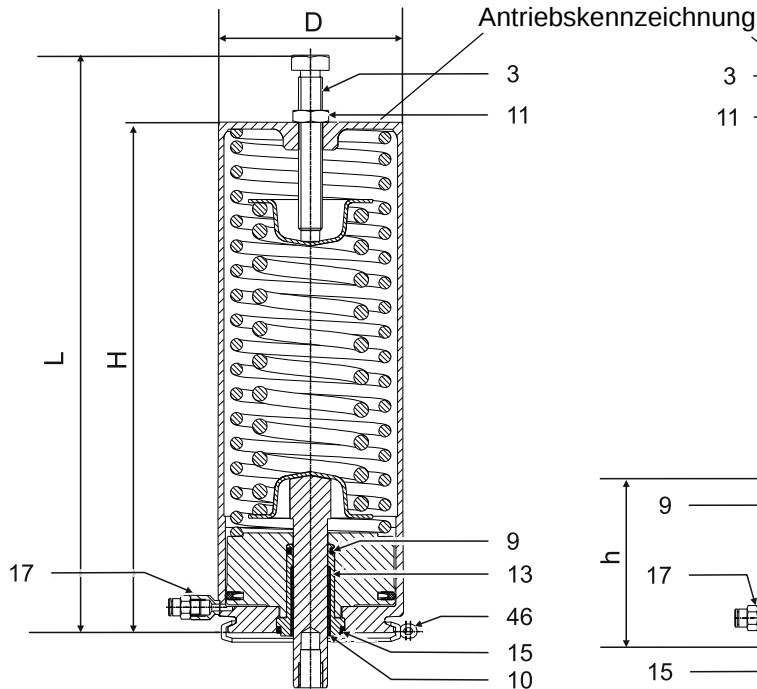

Antrieb M 3, M 4

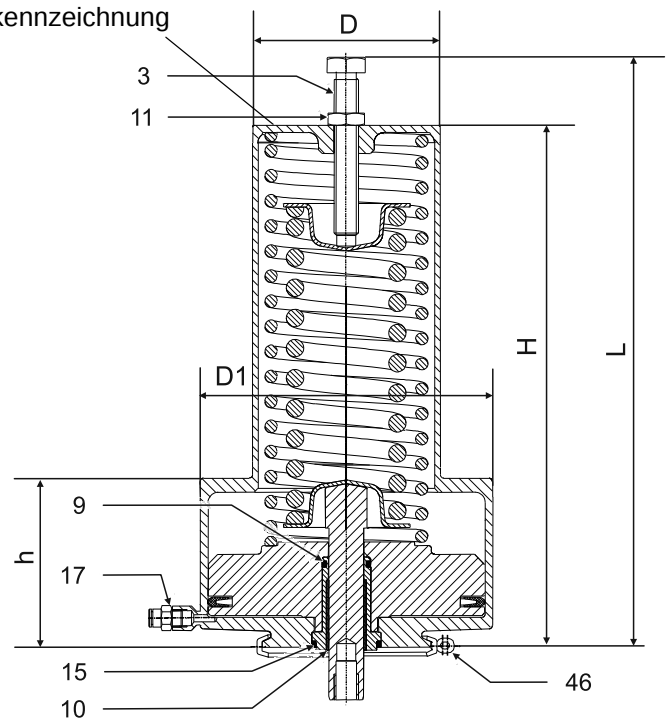

Antrieb M – Material-Nummern

Pos.	Benennung	Werkstoff	M 11	M 21	M 1	M 2	M 3	M 4
Antrieb komplett			221-260.05	221-260.06	221-260.01	221-260.02	221-260.14	221-260.13
3	Stellschraube	A4-70	221-177.05	221-177.05	221-177.05	221-177.05	221-177.05	221-177.05
9	O-Ring	NBR	930-029	930-029	930-029	930-029	930-029	930-029
10	Gleitlager	IGLIDUR-G	704-041	704-041	704-041	704-041	704-041	704-041
11	Sechskant-mutter	A2	910-036	910-036	910-036	910-036	910-036	910-036
13	Buchse	1.4301	221-260.15	221-260.15	221-260.15	221-260.15	221-260.15	221-260.15
15	O-Ring	NBR	930-251	930-251	930-251	930-251	930-251	930-251
17	Einschraub-steckan-schluss, metrisch G1/8"-6/4	Ms/vern.	933-176	933-176	933-176	933-176	933-176	933-176
	Einschraub-steckan-schluss, zöllig G1/8"-6,35	Ms/vern.	933-173	933-173	933-173	933-173	933-173	933-173
46	Klemmver-bindung	1.4401	221-507.06	221-507.06	221-507.06	221-507.06	221-507.06	221-507.06



Antrieb M – Maße in mm

Benennung	M 11	M 21	M 1	M 2	M 3	M 4
D	110	110	110	110	110	110
D 1	--	--	--	--	170	170
h	--	--	--	--	95	95
H	195	195	295	295	295	295
L	275	275	375	375	375	375
Erforderlicher Steuerluftdruck (bar)	3	3	3	4	3	5

Ansprechdruck Antrieb M

Nennweite		Ansprechdruck (bar)					
Metrisch	Zoll OD/IPS.	M 11	M 21	M 1	M 2	M 3	M 4
25	1"	1,5 - 4,5	3 - 9	8 - 16	--	--	--
40	1,5"	--	1,5 - 2	1,5 - 5	4 - 15	14 - 16	--
50	2"	--	--	1,5 - 4	3 - 11	10 - 16	--
65	2,5"	--	--	--	1 - 4	3 - 10	9 - 15
80	3"	--	--	--	1 - 4	3 - 10	9 - 10
100	4"	--	--	--	0,5 - 1,5	0,5 - 4	3 - 7