

# Subject to mod

## **GEA Bagtip w. Sieve**

#### **Technical data**

The GEA Bag Tip enables small bags of powder <50 kg to be efficiently and ergonomically introduced into the process.

#### **Features**

- Proven developed design
- Material of construction configurable to suit industry requirements
- GMP & ergonomical design
- Sanitary design (configurable)
- Low maintenance
- Easy access for cleaning
- CIP option
- ATEX / IECEx / UKEX / CSA
- Built in sieving to remove foreign contamination
- Built in storage




### Operating principles and constructional features



- 1 Lid
- 2 Sieve
- **3** Bag support table
- 4 Discharge

Process data		
Bag size	700 to 800mm (27 to 31 in) length	
Rate	Typical 4 TPH	
Dust collection	Port for connection to dust collector	
Sieve screen size	Min 5mm mesh	
Bag support table		
Lid with gas struts		
Comp air press	6 - 7 barg	
kW	0.2	
Voltage	380 to 440 Vac	
Material of construction	SS304	
Weight	Based on configuration	

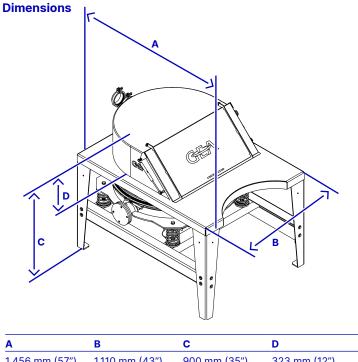

Α	В	C	D
1,456 mm (57")	1,110 mm (43")	900 mm (35")	323 mm (12")

#### Standard scope of delivery

- Bag tip with support legs
- Sieve with flexible and vibrating motor

#### **Optional additional equipment**

- SS316 construction
- · Air tight lid seal