



# GEA Ariete Homogenizer 5315

Homogenizer & High Pressure Pump  
Technical datasheet

The Ariete series is the state-of-the-art technology for powerful reliable high pressure machines and customized solutions. The Ariete machines, compliant to EU safety rules (CE standards) and built according to EN ISO 9001:2008 Quality System, are the best fit for pharmaceutical, dairy, food & beverage, biotechnology, chemical and cosmetics industries.

## Liquid end

- High quality forged stainless steel and special high wear resistant materials for best mechanical and corrosion resistance performance
- Optimized cleanable design with 3-A and electropolished versions available
- Ball (PVB) and poppet valves (PVP) interchangeable into the same block design for maximum product handling flexibility
- Aseptic version compression block available as option, with sterile condensate packing flushing
- Various materials for pumping plungers
- Product outlet on the left side
- Monoblock construction, up to 700 bar, or multiblock, over 700 bar forged high grade Duplex or Super Duplex SS alloy

## Homogenizing valve

- One stage (standard on homogenizers) with pneumatic adjustment from the machine's control panel
- High efficiency homogenizing valves, based on advanced fluid dynamics concepts type NanoVALVE™ and Re+VALVE, available as standard
- Second homogenizing stage and aseptic execution as options

# GEA Ariete Homogenizer 5315

## Homogenizer & High Pressure Pump

Available up to 1500 bar, suitable for CIP and SIP, the Ariete machines can be supplied with all necessary customizations for easy integration in any process line, sanitary or aseptic. The wide range of available materials, the low running speed and linear plunger velocity allow Ariete machines to perform at their best also on abrasive and viscous product.

### Power end

- Rugged cast iron power frame
- Heavy duty and reliable power frame housing the transmission elements with integrated planetary gearbox
- AC motor drive
- Forced lubrication with gear pump, low oil pressure switch and oil cooling
- “V” belts drive with belts tensioning system

### Casing

- Made in polished stainless steel
- Inlet manifold fitted inside case ensures considerable noise reduction
- Noise level calculated on 65.000 l/h@200bar at a distance of 1 m is <85 db and calculated at 2 m the value is <82 db
- Easy access and maintenance with removable panels
- Fully separated liquid-end from drive end
- Safe access to the auxiliary systems on board the machine
- Large front doors offer a full visibility of the process part

### Plungers

- Chrome coated stainless steel
- Tungsten carbide coated stainless steel
- Solid ceramic and HCR Chromium Carbide coated stainless steel

### Tools and spare parts

- Ordinary maintenance tools and one set of emergency spare parts supplied with the machine
- O&M manual and spare part list

### Pump valves

- High wear resistant Stellite™ alloy removable seats; Tungsten Carbide as option
- Ball type (PVB) or poppet type (PVP) in solid Stellite™
- Ceramic or tungsten carbide materials available as option

### Product line connections

- DIN 11851, Tri-Clamp™, GEA Tuchenhausen Varivent™
- Others as option upon request


### Saving options on request

- NiSoPURE saves 90% of water and steam in aseptic productions
- NanoVALVE reduces 30% of pressure (=energy)
- OPS prevents oil waste with service time & cost savings

### Main options on request

- 2<sup>nd</sup> stage homogenizing valve
- Electric power board for fixed or variable capacity (with frequency converter)
- Aseptic execution available
- 3-A execution, FDA approved gasket and cGMP documentation
- Automatic front door opening system
- Acoustic based service monitoring systems
- Product outlet from right side
- Double inlet manifold
- Spare part packages

### Dimensional drawing

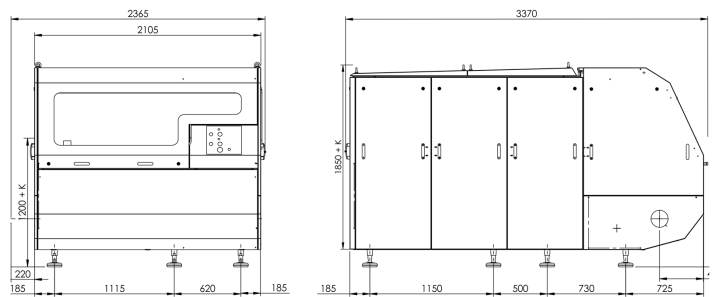

Overall dimensions (mm)

### Performance

Pressure (bar)	Max Flow Rate (l/h)	Pressure (bar)	Max Flow Rate (l/h)
120	65.000	300	28.000
150	55.000	400	21.000
180	47.000	500	17.000
200	41.000	600	14.000
250	34.000		

Each line refers to a different machine, which is designed for the specific maximum pressure and the specific maximum capacity.

### Design features

Number of plungers	5
Stroke	150 mm
Absorbed motor power up to	315 kW
Net weight	8.000 kg
Gross weight	9.000 kg
Lubricating Oil for crankcase and gearbox ISO VG 150	95 l
Lubricating/cooling water (inlet @ 14°C)*	± 430 l/h

\* Air cooling unit for gearbox oil available

### GEA Italy

GEA Mechanical Equipment Italia S.p.A.

Via A.M. Da Erba Edoari, 29  
43123 Parma, Italy

Phone +39 0521 965411

Fax +39 0521 242819

gea.com/contact